





# SANDFREE SCREEN

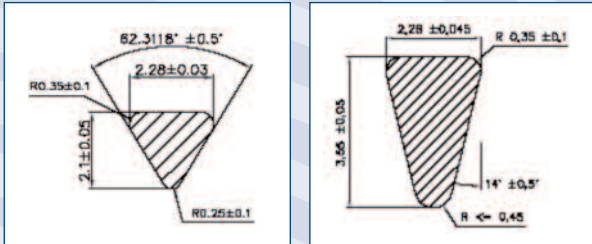

Accurate v-shaped free flow wires. (more wires available)

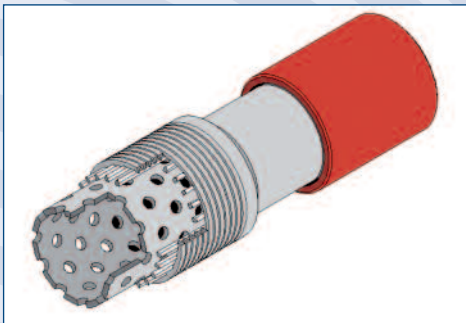

## Sand Free Screen

Our Sand Free Screen is a pipe base wire wrapped screen available in several designs, customized to well demands.

These screens are used in stand-alone completions with well sorted formations or in combination with gravel pack completions.

## Wire wrapped screen

The advanced wire wrapped screen technology provides superior weld strength and accurate slot openings. The accurate V-shaped wires provide free flow and optimal sand control.

A large number of support rods increases tensile strength and achieves rounder and stronger screens.

The screen jacket is fully pickled and passivated for maximum corrosion resistance.

**The result is a reliable and robust solution for sand free production in vertical and horizontal wells with gravel pack or stand alone completions.**

## Features

The SandFree Screen design provides;

- Tensile, load, collapse strength
- Rotating ability during installation
- High corrosion resistance
- Very accurate slot opening
- Minimum risk cementing up
- Uncomplicated installation

## Customized design

The design is customized to your demands;

- Slot opening from 50 micron up to 2000 micron
- All API and ANSI pipe sizes are available
- Customized construction:
  - Lower V-wires for reduced OD
  - Higher support rods for more standoff
- Customized material grades 304/316L/904/Duplex/Alloy 825/625/C276 etc.
- Customized end-fittings and threaded connections
- Fixation of screen by welding or shrink fitting of end-rings to the base-pipe

**H.P. Well Screen B.V.**

Nijverheidsstraat 14 7641 AB Wierden

Phone: +31 546 577 908 Fax: +31 546 577 883

[sales@hpwellscreen.com](mailto:sales@hpwellscreen.com) [www.hpwellscreen.com](http://www.hpwellscreen.com)